

BEST AVAILABLE COPY

NOI/1804/51780

ID 04/51780



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 14 OCT 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03103558.7

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03103558.7
Demande no:

Anmeldetag:
Date of filing: 25.09.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Motion blurring

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06T15/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Motion blurring**FIELD OF THE INVENTION**

The invention relates to a method of generating motion blur in a graphics system, and to a graphics computer system.

5 BACKGROUND OF THE INVENTION

Usually, images are displayed on a display screen of a display apparatus in successive frames of lines. 3D objects displayed on the display screen which move with a large speed have a large frame to frame displacement. This is in particular the case for 3D games. The large displacement may lead to visual artifacts, often referred to as temporal
10 aliasing. Temporal filtering, which adds blur to the images, alleviates these artifacts.

An expensive approach to alleviate temporal aliasing is to increase the frame rate such that the motions of the objects result in smaller frame to frame displacements. However, a high refresh rate requires an expensive display apparatus capable to display images with these high refresh rates.

15 Another approach is temporal super-sampling wherein the images are rendered multiple times within the frame display time interval. The rendered images are averaged and then displayed. This approach requires the 3D application to send the geometry for several instances within the frame to frame interval which requires a very powerful processing.

A cost effective solution is to average a present image during the present
20 frame with the previous displayed image of the preceding frame. This approach provides an approximation of motion blur only, it does not provide a satisfactory quality of the images.

US-B-6,426,755 discloses a graphics system and method for performing blur effects. In one embodiment, the system comprises a graphics processor, a sample buffer, and a sample-to-pixel calculation unit. The graphics processor is configured to render a plurality
25 of samples based on a set of received three-dimensional graphics data. The processor is also configured to generate sample tags for the samples, wherein the sample tags are indicative of whether or not the samples are to be blurred. The super-sampled sample buffer receives and stores the samples from the graphics processor. The sample-to-pixel calculation unit receives and filters the samples from the super-sampled sample buffer to generate output pixels which

form an image on a display device. The sample-to-pixel calculation units are configured to select the filter attributes used to filter the samples into output pixels based on the sample tags.

5 SUMMARY OF THE INVENTION

It is an object of the invention to add the blur during a rasterization operation with a one-dimensional filter.

A first aspect of the invention provides a method of generating motion blur in a graphics system as claimed in claim 1. A second aspect of the invention provides a
10 computer graphics system as claimed in claim 14. Advantageous embodiments are defined in the dependent claims.

In the method of generating motion blur in a graphics system in accordance with the first aspect of the invention, geometrical information defining a shape of a graphics primitive is received, this geometrical information may be the three-dimensional graphics
15 data referred to in US-B-6,426,755. It is also possible to use two-dimensional graphics data which is supplied by an application in a system which has less processing resources. The method uses displacement information determining a displacement vector defining a direction of motion of the graphics primitive to sample the graphics primitive in the direction of the motion to obtain input samples. A one dimensional spatial filtering of the input
20 samples provides the temporal filtering. In this manner a high quality blur is obtained without requiring complex processing and filtering.

A simple one dimensional filter is used without requiring redundant calculations. In contrast, the post-processing of US-B-6,426,755 has to calculate a two-dimensional filter with a per pixel varying direction and amount of filtering. The approach in
25 accordance with the invention has the advantage that sufficient motion blur is introduced in an effective manner. It is not required to increase the frame rate, nor to increase the temporal sample rate, the quality of the images is better than obtained by the prior art averaging.

A further advantage is that this approach can be implemented in the well known inverse texture mapping approach as claimed in claim 6, and in the forward texture
30 mapping approach as claimed in claim 7. The known inverse mapping approach and the forward texture mapping approach as such will be elucidated in more detail with respect to Figures 2 and 4.

In an embodiment in accordance with the invention as defined in claim 2, the footprint of the one-dimensional filter varies with the magnitude of the displacement vector

and thus with the motion. This has the advantage that the amount of blur introduced is correlated with the amount of displacement of a graphics primitive. If a low amount of movement is present, only a low amount of blur is introduced and a high amount of sharpness is preserved. If a high amount of movement is present, a high amount of blur is introduced to suppress the temporal aliasing artifacts. Thus, an optimal amount of blur is provided. It is
5 easy to vary the amount of filtering because a one-dimensional filter is required only.

In an embodiment in accordance with the invention as defined in claim 3, the displacement vector is supplied by the 2D (two-dimensional) or 3D (three-dimensional) application which, for example, is a 3D game. This has the advantage that the programmers
10 of the 2D or 3D application have full control over the displacement vector and thus can steer the amount of blur introduced.

In an embodiment in accordance with the invention as defined in claim 4, the 2D or 3D application provides information which defines the position and the orientation of the graphics primitives during a previous frame. The method of generating motion blur in
15 accordance with an embodiment of the invention determines the displacement vector of the graphics primitives by comparing the position and the orientation of the graphics primitives in the present frame with the position and the orientation of the graphics primitives of the previous frame. This has the advantage that the displacement vectors do not have to be calculated by the 3D application in software, but instead the geometry acceleration hardware
20 can be used for determining the displacement vectors.

In an embodiment in accordance with the invention as defined in claim 5, the buffering of the position and the orientation of the graphics primitives during the previous frame is performed by the method of generating motion blur in accordance with the invention. This has the advantage that a standard 3D application can be used, the
25 displacement vectors are completely determined by the method of generating motion blur in accordance with the invention.

In an embodiment in accordance with the invention as defined in claim 6, the method of generating motion blur is implemented in the well know inverse texture mapping approach.

30 The intensities of the pixels present in the screen space define the displayed image on the screen. Usually, the pixels are actually positioned (in a matrix display) or thought to be positioned (in a CRT) in an orthogonal matrix indicated by an orthogonal x and y coordinate system. In the embodiment in accordance with the invention as defined in claim 6, the x and y coordinate system is rotated such that the screen displacement vector in the

screen space occurs in the direction of the x-axis. Therefore, the sampling is performed in the screen space in the direction of the screen displacement vector. The graphics primitive in the screen space is the real world graphics primitive mapped (also referred to as projected) to the rotated screen space. Usually, the graphics primitive is a polygon. The screen displacement vector is the displacement vector of the eye space graphics primitive mapped to the screen space. The eye space graphics primitive is also referred to as the real world graphics primitive, which does not indicate that a physical object is meant, also synthetic objects are covered. The sampling provides coordinates of the resampled pixels which are used as input samples for the inverse texture mapping, instead of the coordinates of the pixels in the non-rotated coordinate system.

Then, the well known inverse texture mapping is applied. A blurring-filter which has a footprint in the rotated coordinate system, is allocated to the pixels. The pixels within the footprint will be filtered in accordance with the blurring-filter amplitude characteristics. The footprint in the screen space is mapped to the texture space and called the mapped footprint. Also the polygon in the screen space is mapped to the texture space and called the mapped polygon. The texture space comprises the textures which should be displayed on the surface of the polygon. These textures are defined by texel intensities stored in a texture memory. Thus, the textures are appearance information which defines an appearance of the graphics primitive by defining texel intensities in a texture space.

The texels both falling within the mapped footprint and within the mapped polygon are determined, the mapped blurring-filter is used to weight the texel intensities of these texels to obtain the intensities of the pixels in the rotated coordinate system (thus, the intensities of the resampled pixels instead of the intensities of the pixels in the well known inverse texture mapping wherein the coordinate system is not rotated).

The one-dimensional filtering averages the intensities of the pixels in the rotated coordinate system to obtain averaged intensities. A resampler resamples the averaged pixel intensities of the resampled pixels to obtain the intensities of the pixels in the original non-rotated coordinate system from the averaged intensities.

In an embodiment in accordance with the invention as defined in claim 7, the method of generating motion blur is implemented in the forward texture mapping approach.

In the texture space the texel intensities of the graphics primitive in the texture space are resampled in the direction of a texture displacement vector to obtain resampled texels (RTi). The texel displacement vector is the real world displacement vector mapped to the texel space. The texel intensities, which are stored in a texture memory, are interpolated

to obtain the intensities of the resampled texels. The one-dimensional spatial filtering averages the intensities of the resampled texels in accordance with a weighting function to obtain filtered texels. The filtered texels of the graphics primitive are mapped to the screen space to obtain mapped texels. The intensity contributions of a mapped texel to all the pixels of which a corresponding pre-filter footprint of a pre-filter covers the mapped texel is
5 determined. The contribution of a mapped texel to a particular pixel depends on the characteristic of the pre-filter. For each pixel, the intensity contributions of the mapped texels are summed to obtain the intensity of each one of the pixels.

Thus, said in other words, the coordinates of texels within the polygon in
10 texture space are mapped to the screen space, and a contribution from a mapped texel to all the pixels of which the corresponding pre-filter footprint covers this texel is determined in accordance with the filter characteristic for this texel, and finally all the contribution of the texels are summed for each pixel to obtain the pixel intensity.

In an embodiment in accordance with the invention as defined in claim 8, the
15 displacement vector of the graphics primitive is determined as an average of the displacement vectors of vertices of the graphics primitive. This has the advantage that only a single displacement vector for each polygon is required, which displacement vector can be determined in an easy manner. It suffices if the directions of the displacement vectors of the vertices is averaged. The magnitude of the displacement vector may be interpolated over the
20 polygon.

In an embodiment in accordance with the invention as defined in claim 9, the intensities of the resampled pixels are distributed, in the screen space, in a direction of the displacement vector in the screen space over a distance determined by a magnitude of the displacement vector to obtain distributed intensities. The overlapping distributed intensities
25 of different pixels are averaged to obtain a piece-wise constant signal which is the averaged intensity in screen space. This has the advantage that a shutter behavior of a camera is resembled, thus providing a very acceptable motion blur.

In an embodiment in accordance with the invention as defined in claim 10, the
30 the intensities of the resampled texels are distributed, in the texture space, in a direction of the displacement vector in the texture space over a distance determined by a magnitude of the displacement vector to obtain distributed intensities. The overlapping distributed intensities of different resampled texels are averaged to obtain a piece-wise constant signal which is the averaged intensity in the texture space (also referred to as filtered texel). This has the

advantage that a shutter behavior of a camera is resembled, thus providing a very acceptable motion blur.

In an embodiment in accordance with the invention as defined in claim 11, the one-dimensional spatial filtering applies different weighted averaging functions during one or more frame-to-frame intervals. This has the advantage that although in each frame an efficient one-dimensional filter is performed, a higher-order temporal filtering is obtained. At the rendering of the frame, only partial intensities of the pixels are calculated which have to be stored. The pixel intensities of n successive frames have to be accumulated to obtain the correct pixel intensities. In this case, n is the width of the temporal filter. The higher-order filtering provides less aliasing with a same amount of blur, or, equivalently, a reduced blur with the same amount of temporal aliasing.

In an embodiment in accordance with the invention as defined in claim 12, the distance over which the resampled pixels or the resampled texels are distributed is rounded to a multiple of the distance between resampled texels. This avoids a doubling of the number of resampled texels during the accumulation of the distributed intensities of the texels.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In an embodiment in accordance to the invention as defined in claim 13, the motion vector now is subdivided in segments. In the embodiment in accordance with the invention as defined in claim 10, the intensities of the resampled texels are distributed, in the texture space, in a direction of the displacement vector in the texture space over a distance determined by a magnitude of the displacement vector to obtain distributed intensities. The overlapping distributed intensities of different resampled texels are averaged to obtain a motion blurred texture which is a piece-wise constant signal. Wherein the displacement vector is valid for a complete frame, and thus the motion blur is introduced in images rendered at a frame rate.

The motion vector of the embodiment defined in claim 13 is subdivided in segments which are associated with sub-displacement vectors, one for each segment, and thus the motion blur is introduced in images rendered at a higher frame rate determined by the number of segments in a frame period. In fact a frame rate up-conversion is reached. Now, the frame period is sub-divided in a number of sub-frames which is equal to the number of segments. Thus, instead of the single frame, several sub-frames are rendered on the basis of a single sampling of the 3D model including the displacement information covered by the

motion vector. The blur size of objects within these sub-frames may be shortened according to the frame rate up conversion.

BRIEF DESCRIPTION OF THE DRAWINGS

- 5 In the drawings:
- Fig. 1 elucidates a display of a real world 3D object on a display screen,
- Fig. 2 elucidates the known inverse texture mapping,
- Fig. 3 shows a block diagram of a circuit for performing the known inverse
- texture mapping,
- 10 Fig. 4 elucidates the forward texture mapping,
- Fig. 5 shows a block diagram of a circuit for performing the forward texture
- mapping,
- Fig. 6 shows a block diagram of a circuit in accordance with an embodiment
- of the invention,
- 15 Fig. 7 elucidates the sampling in the direction of the displacement vector in the
- screen space,
- Fig. 8 shows a block diagram of a circuit in accordance with an embodiment
- of the invention comprising the inverse texture mapping,
- Fig. 9 elucidates the sampling in the direction of the displacement vector in the
- 20 texture space,
- Fig. 10 shows a block diagram of a circuit in accordance with an embodiment
- of the invention comprising forward texture mapping,
- Fig. 11 shows an embodiment of a blurring filter with a footprint,
- Fig. 12 shows the determination of a displacement vector of a polygon based
- 25 on the displacement vectors of vertices of the polygon,
- Fig. 13 shows the temporal pre-filtering using stretched pixels in accordance
- with an embodiment of the invention.
- Fig. 14 shows the temporal pre-filtering using stretched texels in accordance
- with an embodiment of the invention,
- 30 Fig. 15 shows the approximation of motion blur of a camera by using the
- stretched texels in accordance with an embodiment of the invention,
- Figs. 16 show schematically that it is possible to sub-divide the frame period
- in sub-frame periods, and

Fig. 17 shows a block diagram of a circuit in accordance with an embodiment of the invention comprising the forward texture mapping combined with frame rate up-conversion.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 elucidates a display of a real world 3D object on a display screen. A real world object WO, which may be a three-dimensional object such as the cube shown, is projected on a two-dimensional display screen DS. The three-dimensional object WO has a surface structure or texture which defines the appearance of the three-dimensional object
10 WO. In Fig. 1 the polygon A has a texture TA and the polygon B has a texture TB. The polygons A and B are with a more general term also referred to as the real world graphics primitives.

The projection of the real world object WO is obtained by defining an eye or camera position ECP with respect to the screen DS. In Fig. 1 is shown how the polygon SGP
15 corresponding to the polygon A is projected on the screen DS. The polygon SGP in the screen space SSP defined by the coordinates X and Y is also referred to as a graphics primitive instead of the graphics primitive in the screen space. Thus, with graphics primitive is indicated the polygon A in the eye space, or the polygon SGP in the screen space, or the polygon TGP in the texture space, it is clear from the context which graphics primitive is
20 meant. It is only the geometry of the polygon A which is used to determine the geometry of the polygon SGP. Usually, it suffices to know the vertices of the polygon A to determine the vertices of the polygon SGP.

The texture TA of the polygon A is not directly projected from the real world into the screen space SSP. The different textures of the real world object WO are stored in a
25 texture map or texture space TSP defined by the coordinates U and V. For example, Fig. 1 shows that the polygon A has a texture TA which is available in the texture space TSP in the area indicated by TA, while the polygon B has another texture TB which is available in the texture space TSP in the area indicated by TB. The polygon A is projected on the texture space TA such that a polygon TGP occurs such that when the texture present within the
30 polygon TGP is projected on the polygon A the texture of the real world object WO is obtained or at least resembled as much as possible. A perspective transformation PPT between the texture space TSP and the screen space SSP projects the texture of the polygon TGP on the corresponding polygon SGP. This process is also referred to as texture mapping.

Usually, the textures are not all present in a global texture space, but every texture defines its own texture space.

Fig. 2 elucidates the known inverse texture mapping. Fig. 2 shows the polygon SGP in the screen space SSP and the polygon TGP in the texture space TSP. To facilitate the elucidation, it is assumed that both the polygon SGP and the polygon TGP correspond to the polygon A of the real world object WO of Fig. 1.

The intensities P_i of the pixels P_i present in the screen space SSP define the image displayed. Usually, the pixels P_i are actually positioned (in a matrix display) or thought to be positioned (in a CRT) in an orthogonal matrix of positions. In Fig. 2 only a limited number of the pixels P_i is indicated by the dots. The polygon SGP is shown in the screen space SSP to indicate which pixels P_i are positioned within the polygon SGP.

The texels or texel intensities T_i in the texture space TSP are indicated by the intersections of the horizontal and vertical lines. These texels T_i which usually are stored in a memory called texture map define the texture. It is assumed that the part of the texel map or texture space TSP shown corresponds to the texture TA shown in Fig. 1. The polygon TGP is shown in the texture space TSP to indicate which texels T_i are positioned within the polygon TGP, these texels T_i are indicated by small crosses.

The well known inverse texture mapping comprises the steps elucidated in the now following. A blurring-filter which has a footprint FP is shown in the screen space SSP and has to operate on the pixels P_i to perform a weighted averaging operation required to obtain the blurring. This footprint FP in the screen space SSP is mapped to the texture space TSP and called the mapped footprint MFP. The polygon TGP which may be obtained by mapping the polygon SGP from the screen space SSP to the texture space TSP is also called the mapped polygon. The texture space TSP comprises the textures TA, TB (see Fig. 1) which should be displayed on the surface of the polygon SGP. As described above, these textures TA, TB are defined by texel intensities T_i stored in a texel memory. Thus, the textures TA, TB are appearance information which define an appearance of the graphics primitive SGP by defining texel intensities T_i in a texture space TSP.

The texels T_i both falling within the mapped footprint MFP and within the mapped polygon TGP are determined. These texels T_i are indicated by the crosses. The mapped blurring-filter MFP is used to weight the texel intensities T_i of these texels T_i to obtain the intensities of the pixels P_i .

Fig. 3 shows a block diagram of a circuit for performing the known inverse texture mapping. The circuit comprises a rasterizer RSS which operates in the screen space

SSP, a resampler RTS in the texture space TSP, a texture memory TM and a pixel fragment processing circuit PFO. U_t , V_t is the texture coordinate of a texel T_i with index t , X_p , Y_p is the screen coordinate of a pixel with index p , I_t is the color of the texel T_i with index t , and I_p is the filtered color of pixel P_i with index p .

5 The rasterizer RSS rasterizes the polygon SGP in the screen space SSP. For every pixel P_i traversed, its blurring filter footprint FP is mapped to the texture space TSP. The texels T_i within the mapped footprint MFP and within the mapped polygon TGP are determined and weighted according to a mapped profile of the blurring filter. The color of the pixels P_i is computed using the mapped blurring filter in the texture space TSP.

10 Thus, the rasterizer RSS receives the polygons SGP in the screen space SSP to supply the mapped blurring filter footprint MFP and the coordinates of the pixels P_i . A resampler in the texture space RTS receives the mapped blurring filter footprint MFP and information on the position of the polygon TGP to determine which texels T_i are within the mapped footprint MFP and within the polygon TGP. The intensities of the texels T_i determined in this manner are retrieved from the texture memory TM. The blurring filter filters the relevant intensities of the texels T_i determined in this manner to supply the filtered color I_p of the pixel P_i .

15 The pixel fragment processing circuit PFO provides an improved processing of pixels near to borders of the polygon SGP and supplies the pixel intensities P_{li} of the pixels P_i displayed on the screen DS. The pixel fragment processing circuit PFO blends the blur if several polygons are moving.

20 Fig. 4 elucidates forward texture mapping. Fig. 4 shows the polygon SGP in the screen space SSP and the polygon TGP in the texture space TSP. To facilitate the elucidation, it is assumed that both the polygon SGP and the polygon TGP correspond to the polygon A of the real world object WO of Fig. 1.

25 The intensities P_{li} of the pixels P_i present in the screen space SSP define the image displayed. The pixels P_i are indicated by the dots. The polygon SGP is shown in the screen space SSP to indicate which pixels P_i are positioned within the polygon SGP. The pixel actually indicated by P_i is positioned outside the polygon SGP. With each pixel P_i a footprint FP of a blur filter is associated.

30 The texels or texel intensities T_i in the texture space TSP are indicated by the interstices of the horizontal and vertical lines. Again, these texels T_i which usually are stored in a memory called texture map define the texture. It is assumed that the part of the texel map or texture space TSP shown corresponds to the texture TA shown in Fig. 1. The polygon TGP

is shown in the texture space TSP to indicate which texels T_i are positioned within the polygon TGP.

The coordinates of the texels T_i within the polygon TGP are mapped (resampled) to the screen space SSP. In Fig. 4, this mapping (indicated by the arrow AR from the texture space TSP to the screen space SSP) of a texel T_i (indicated by a cross in the texture space) to the screen space SSP provides mapped texels MT_i (indicated by the cross in the screen space SSP, which cross may be positioned in-between pixel positions indicated by the dots) in the screen space SSP. A contribution of the mapped texel MT_i to all the pixels P_i which have a footprint FP of the blur filter which encompasses the mapped texel MT_i is determined in accordance with the filter characteristic of the blur filter. All the contributions of the mapped texels MT_i to the pixels P_i are summed to obtain the intensities PI_i of the pixels P_i .

In the forward texture mapping, the resampling from the colors of the texel T_i to the colors of the pixels P_i occurs in the screen space SSP, and thus is input sample driven. Compared to the inverse texture mapping, it is easier to determine which texels T_i contribute to a particular pixel P_i . Only the mapped texels MT_i which are within a footprint FP of the blurring filter for a particular pixel P_i will contribute to the intensity or color of this particular pixel P_i . Further, there is no need to transform the blurring filter from the screen space SSP to the texel space TSP.

Fig. 5 shows a block diagram of a circuit for performing the forward texture mapping. The circuit comprises a rasterizer RTS which operates in the texture space TSP, a resampler RSS in the screen space SSP, a texture memory TM and a pixel fragment processing circuit PFO. U_t , V_t is the texture coordinate of a texel T_i with index, X_p , Y_p is the screen coordinate of a pixel with index p , I_t is the color of the texel T_i with index t , and I_p is the filtered color of pixel P_i with index p .

The rasterizer RTS rasterizes the polygon TGP in the texture space TSP. For every texel T_i which is within the polygon TGP, the resampler in the screen space RSS maps the texel T_i to a mapped texel MT_i in the screen space SSP. Further, the resampler RSS determines the contribution of a mapped texel MT_i to all the pixels P_i of which the associated footprint FP of the blurring filter encompasses this mapped texel MT_i . Finally, the resampler RSS sums the intensity contributions of all mapped texels MT_i to the pixels P_i to obtain the intensities PI_i of the pixels P_i .

The pixel fragment processing circuit PFO provides an improved processing of pixels near to borders of the polygon SGP and supplies the pixel intensities PI_i of the pixels P_i displayed on the screen DS.

Fig. 6 shows a block diagram of a circuit in accordance with an embodiment of the invention. This motion blur generating circuit comprises a rasterizer RA, a displacement providing circuit DIG, and a one-dimensional filter ODF.

The rasterizer RA receives both geometrical information GI which defines the shape of a graphics primitive SGP or TGP and displacement information DI which determines a displacement vector defining a direction of the motion of the graphics primitive SGP or TGP. The rasterizer RA samples the graphics primitive SGP or TGP in the direction of the displacement vector to obtain samples RPI . The one-dimensional filter ODF provides a temporal pre-filtering by filtering the samples RPI to obtain averaged intensities $ARPI$.

The rasterizer RA may operate in the screen space SSP or in the texture space TSP. If the rasterizer RA operates in the screen space SSP, the graphics primitive SGP or TGP may be the polygon SGP, and the samples RPI are based on the pixels P_i . If the rasterizer RA operates in the texture space TSP, the graphics primitive SGP or TGP may be the polygon TGP, and the samples RPI are based on the texels T_i .

The use of a rasterizer RA in the screen space SSP is elucidated with respect to Fig. 7 and with respect to its combination with the inverse texture mapping (see Fig. 8).

The use of a rasterizer RA in the texture space TSP is elucidated with respect to Fig. 9 and with respect to its combination with the forward texture mapping (see Fig. 10).

Fig. 7 elucidates the sampling in the direction of the displacement vector in the screen space. The real world object WO moves in a certain direction. This movement of the complete object WO causes the graphics primitives (the polygons A and B) to move also. The movement of the polygon A can be indicated in the screen space SSP by the displacement vector SDV of the polygon SGP. Other polygons of the real world object WO may have other displacement vectors. The intensities PI_i of the pixels P_i are resampled such that resampled pixels RPI are determined which are positioned in a rectangular grid of which one direction coincides with the direction of the displacement vector SDV. The pixels P_i are indicated by dots, the resampled pixels RPI are indicated by crosses. Only a few pixels P_i and resampled pixels RPI are shown.

The pixels P_i of which the intensities PI_i determine the image displayed are positioned in the orthogonal coordinate space defined by the orthogonal axis x and y. The

resampled pixels RP_i are positioned in the orthogonal coordinate space defined by the orthogonal axis x' and y' .

Fig. 8 shows a block diagram of a circuit in accordance with an embodiment of the invention comprising the inverse texture mapping.

5 The sampler RSS, which is the sampler RA shown in Fig. 6 which samples in the screen space SSP, samples within a polygon SGP in the direction of the displacement vector SDV of this polygon SGP to obtain resampled pixels RP_i . Therefore, the sampler RSS receives the geometry of the polygon SGP and the displacement information DI from the displacement providing circuit DIG. The displacement information DI may comprise the
10 direction in which the displacement occurs and the amount of displacement and thus may be the displacement vector SDV. The displacement vector SDV may be supplied by the 3D application, or may be determined by the displacement providing circuit DIG from the position of the polygon A in successive frames. The resampled pixels RP_i occur in an equidistant orthogonal coordinate space of positions which are aligned with the displacement
15 vector SDV. Or said differently, the coordinate system x, y in the screen space is rotated such that a rotated coordinate system x', y' is obtained of which the x' axis is aligned with the displacement vector.

 The inverse texture mapper ITM receives the resampled pixels RP_i to supply intensities RIp . The inverse texture mapper ITM operates in the same manner as the well
20 known inverse texture mapping as elucidated with respect to Figs. 2 and 3. But, instead of the coordinates of the pixels P_i , the coordinates of the resampled pixels RP_i are used. Thus, the footprint FP of the filter in the screen space is now defined in the coordinate system which is aligned with the screen displacement vector. This footprint is mapped to the texture space where the texels within both this mapped footprint and within the polygon are weighted
25 according to the mapped filter characteristics to obtain the intensity of the resampled pixel RIp to which the footprint belongs.

 The one-dimensional filter ODF comprises an averager AV and a resampler RSA. The averager AV averages the intensities RIp to obtain averaged intensities $ARIp$. The averaging is performed in accordance with a weighting function WF. The resampler RSA
30 resamples the averaged intensities $ARIp$ to obtain the intensities PLi of the pixels P_i .

 Fig. 9 elucidates the sampling in the direction of the displacement vector in the texture space. The real world object WO moves in a certain direction. This movement of the complete object WO causes the graphics primitives (the polygons A and B) to move also. The movement of the polygon A can be indicated in the texture space TSP by the

displacement vector TDV of the polygon TGP. Other polygons of the real world object WO may have other displacement vectors. The intensities of the texels T_i are resampled such that resampled texels RT_i are obtained which are positioned in a matrix of which one direction coincides with the direction of the displacement vector TDV. The texels T_i are indicated
5 by dots, the resampled texels RT_i are indicated by crosses. Only a few texels T_i and resampled texels RT_i are shown.

The texels T_i of which the intensities determine the texture displayed are positioned in the orthogonal coordinate space defined by the orthogonal axis U and V. The resampled texels RT_i are positioned in the orthogonal coordinate space defined by the
10 orthogonal axis U' and V' . A distance DIS between two samples (texels T_i) in the texture space is indicated by DIS.

Fig. 10 shows a block diagram of a circuit in accordance with an embodiment of the invention comprising the forward texture mapping.

The sampler RTS, which is the sampler RA shown in Fig. 6 which samples in
15 the texture space TSP, samples within a polygon TGP in the direction of the displacement vector TDV of this polygon TGP to obtain the resampled texels RT_i . Therefore, the sampler RTS receives the geometry of the polygon TGP and the displacement information DI from the displacement providing circuit DIG. The displacement information DI may comprise the direction in which the displacement occurs and the amount of displacement and thus may be
20 the displacement vector TDV. The displacement vector TDV may be supplied by the 3D application, or may be determined by the displacement providing circuit DIG from the position of the polygon A in successive frames.

The interpolator IP interpolates the intensities of the texels T_i to obtain the intensities RI_i of the resampled texels RT_i .

25 The one-dimensional filtering ODF comprises an averager AV which averages the intensities RI_i in accordance with a weighting function WF to obtain filtered resampled texels FT_i to which is also referred as filtered texels FT_i .

The mapper MSP maps the filtered texels FT_i within the polygon TGP (in more general also referred to as the graphics primitive) to the screen space SSP to obtain the
30 mapped texels MT_i (see Fig. 4).

The calculator CAL determines the intensity contributions of each of the mapped texels MT_i to each of the pixels P_i of which a corresponding pre-filter footprint FP of a pre-filter PRF (see Fig. 11) covers one of the mapped texels MT_i . The intensity contributions depend on the characteristics of the pre-filter PRF. For example, if the pre-filter

has a cubic amplitude characteristic and if a mapped texel MT_i is very near to a pixel P_i , the contribution of this mapped texel MT_i to the intensity of the pixel P_i is relatively large. If the mapped texel is at the border of the footprint FP of the prefilter which is centered at a pixel P_i , the contribution of the mapped texel MT_i is relatively small. If the mapped texel MT_i is not within the footprint FP of the prefilter of a particular pixel P_i , this mapped texel MT_i will not contribute to the intensity of the particular pixel P_i .

The calculator CAL sums all the contribution of the different mapped texels MT_i to the pixels P_i to obtain the intensities PI_i of the pixels P_i . The intensity PI_i of a particular pixel P_i only depends on the intensities of the mapped texels MT_i within the footprint FP belonging to this particular pixel P_i and the amplitude characteristic of the prefilter. Thus for a particular pixel P_i only the contributions of the mapped texels MT_i within the footprint FP belonging to this particular pixel P_i need to be summed.

Fig. 11 shows an embodiment of a blurring filter with a footprint. The blurring filter (also referred to as pre-filter) PRF , which in Fig. 11 filters in the screen space SSP , has a footprint FP . The footprint FP is the area of the filter PRF in the x and/or y direction in which a mapped texel MT_i contributes to a pixel P_i . The filter PRF is shown for a pixel P_i at a position X_p in the screen space SSP . In the example of the filter PRF shown, the footprint FP is four pixel distances wide and covers in the x -direction the positions X_{p-2} , X_{p-1} , X_p , X_{p+1} , X_{p+2} . A mapped texel MT_i which is mapped at the position X_m will contribute to the pixel P_i at the position X_p with the intensity of the mapped texel MT_i multiplied with the filter value $CO1$.

Fig. 12 shows the determination of a displacement vector of a polygon based on the displacement vectors of vertices of the polygon. The polygon SGP in the screen space SSP has vertices $V1$, $V2$, $V3$, $V4$ to which the displacement vectors $TDV1$, $TDV2$, $TDV3$, $TDV4$, respectively, are associated. Preferably, the displacement vector TDV for all the pixels P_i within the polygon SGP is the average of the displacement vectors $TDV1$, $TDV2$, $TDV3$, $TDV4$. Thus, the displacement vectors $TDV1$, $TDV2$, $TDV3$, $TDV4$ are vectorially added to obtain both the direction and the amplitude (after division by the number of vertices) of the displacement vector TDV .

More complex approaches are possible, for example, if the displacement vectors $TDV1$, $TDV2$, $TDV3$, $TDV4$ are largely different, the polygon may be divided in smaller polygons.

Fig. 13 shows the temporal pre-filtering using stretched pixels in accordance with an embodiment of the invention. The one-dimensional filter ODF is performed by first

distributing the intensities R_{Ip} of the resampled pixels R_{Pi} in the direction of the displacement vector SDV . The distribution of the intensity R_{Ip} is performed in an area around the associated resampled pixel R_{Pi} such that the local intensity R_{Ip} is spread out over this area. The dimensions of the area are determined by the magnitude of the displacement vector SDV . This spreading out of the intensity R_{Ip} is also referred to as stretching the pixels P_i . As an example only, Fig. 13 shows a motion displacement which is 3.25 times the distance between two adjacent resampled pixels R_{Pi} . The pixel stretching in the x' direction (see Fig. 7) is elucidated.

In Fig. 13A, the intensities R_{Ip} of the resampled pixels R_{Pi} are distributed or stretched as indicated by the horizontal lines indicated by D_{Ii} . Each dot on the x' -axis indicates the position of a resampled pixel R_{Pi} . The lines D_{Ii} show that the intensity R_{Ip} of each of the resampled pixels R_{Pi} is distributed to cover another one of resampled pixels R_{Pi} both at the left hand side and at the right hand side of each of the resampled pixels R_{Pi} .

Fig. 13B shows the average of the overlapping distributed intensities D_{Ii} .

Fig. 14 shows the temporal pre-filtering using stretched texels in accordance with an embodiment of the invention. The one-dimensional filter ODF is performed by first distributing the intensities R_{Ii} of the resampled texels R_{Ti} in the direction of the displacement vector TDV . The distribution of the intensity R_{Ii} is performed in an area around the associated resampled texel R_{Ti} such that the local intensity R_{Ii} is spread out over this area. The dimensions of the area are determined by the magnitude of the displacement vector TDV . This spreading out of the intensity R_{Ii} is also referred to as stretching the resampled texels R_{Ti} . As an example only, Fig. 14 shows a motion displacement which is 3.25 times the distance between to adjacent resampled texels R_{Ti} . The texel stretching in the U' direction (see Fig. 9) is elucidated.

In Fig. 14A, the intensities R_{Ii} of the resampled texels R_{Ti} are distributed or stretched as indicated by the horizontal lines indicated by TD_{Ii} , for clarity only a few of these lines are shown, and different lines have a small offset to be able to distinguish them from each other. Each dot on the U' -axis indicates the position of a resampled texel R_{Ti} . The lines TD_{Ii} show that the intensity R_{Ii} of each of the resampled texels R_{Ti} is distributed to cover another one of resampled texels R_{Ti} both at the left hand side and at the right hand side of each one of the resampled texels R_{Ti} .

Fig. 14B shows the average FT_i of the overlapping distributed intensities TD_{Ii} .

The stretched texels are overlapping if the motion displacement during the frame sample interval is larger than the distance between two adjacent resampled texels R_{Ti} .

The piece-wise constant signal FT_i which is obtained by averaging the overlapping parts of the distributed intensities TDI_i is a good approximation of the time-continue integration of a camera as will be explained with respect to Fig. 15. Thus, the result of the texel stretching is a blur which resembles the blur of a traditional camera. This blur is very acceptable to a viewer. If the stretched texels are not overlapping due to no or a small amount of motion, no motion blur is generated and a spatial box reconstruction is applied.

Fig. 14 illustrates the averaging of the overlapping parts of the distributed intensities DI_i for a motion displacement of 3.25 times the mapped texel distances. The obtained piece-wise constant signal FT_i is an approximation of an integrated signal. It is possible to view the piece-wise constant signal FT_i as a box reconstruction of artificial samples that represent the averaged overlapping parts. The artificial samples depend on a varying number of overlapping stretched texels. In Fig. 14, either three or four stretched texels overlap. This can be avoided by restricting the edges of the stretched texels to the resampled or mapped texel positions RT_i . Thus, a motion blur factor is used which is an integer multiple of the distance between resampled texels RT_i .

Fig. 15 shows the approximation of motion blur of a camera by using the stretched texels in accordance with an embodiment of the invention. Fig. 15A shows a texel stretching of eight mapped texel distances. The line indicated by tb shows the positions of the resampled texels RT_i in the U' direction for a particular frame. The line indicated by te shows the positions of the resampled texels RT_i in the U' direction for a frame succeeding the particular frame. The distributed intensities RI_i are indicated by the lines TDI_i . The resulting piece-wise constant intensity FT_i is shown in Fig. 15B. The solid lines indicated by CA show the motion blur introduced by a camera.

With respect to both Figs. 13 and 14, the 3D application may provide the motion blur vectors per vertex. The motion blur vectors indicate the displacement of the vertex from a previous 3D geometry sample instant tb to the current 3D sample instant te (see Figs. 15 and 16. Alternatively, the 3D application may provide information which allows determining the motion blur vectors which are also referred to as the displacement vectors TDV . The footprint or the filter length of the one dimensional filter ODF is associated with the whole or a fraction of the shutter open (or exposure) interval of a normal movie camera. By varying the exposure time and thus the filter footprint, the number of resampled texels RT_i which are within the filter footprint and thus the amount of averaging performed by the filter ODF is varied. In this manner it is possible to compromise between the amount of blur versus the amount of temporal aliasing. For example, to mimic a camera with an exposure

time of one tenth of the frame period t_{fb} the footprint of the (spatial) filter ODF is related to this fraction of the frame period. In Fig. 15 the exposure time is equal to the frame period and thus the full displacement vector TDV between the two frames is used to obtain the motion blurred piece-wise constant intensity FT_i .

5 Figs. 16 show schematically that it is possible to sub-divide the frame period in sub-frame periods.

Fig. 16A shows the intensity RI_i of the resampled texels RT_i at the instant t_b of a first frame. The resampled texels RT_i extend in the direction of the movement U' of the vertex and are indicated on the U' axis with equidistant spaced dots. In this example, the
10 intensity RI_i of the resampled texels RT_i is 100% from position p_1 to p_2 , and 0% for other positions.

Fig. 16B shows the intensity RI_i of the resampled texels RT_i at the instant t_e of a second frame which immediately succeeds the first frame. The resampled texels RT_i extend in the direction of the movement U' of the vertex and are indicated on the U' axis
15 with equidistant dots. In this example, the intensity RI_i of the resampled texels RT_i is 100% from position p_5 to p_6 , and 0% for other positions. Thus, from the first frame to the second frame, the texel intensities are moved from position p_1 to position p_5 as indicated by the displacement vector TDV.

Fig. 16C is a combined representation of Figs. 16A and 16B. Now, the vertical
20 axis represents the time while the intensity RI_i of the resampled texels RT_i is indicated by a thick non-dashed line WH if the intensity is 100% or by a dashed line BL if the intensity is 0%. The resampled texels RT_i are not explicitly indicated from Fig. 16C onwards, but might occur at the same positions as shown in Figs. 16A and 16B. The period of time between the occurrence of the first and the second frame is indicated by the frame period TFP, which
25 more precisely is the frame repetition period. Fig. 16C is in fact similar to Fig. 15A.

Fig. 16D shows schematically the motion blurred texels FT_i , in case of non-frame-rate-up conversion also referred to as the piece wise constant signal FT_i . The same signal together with the more detailed piece wise constant signal FT_i is shown in Fig. 15B. With respect to Figs. 15 it is described how this piece wise constant signal FT_i is obtained by
30 averaging the "stretched" intensities RI_i of the resampled texels RT_i . The amount of stretching depends on the magnitude of the displacement vector TDV and the shutter open interval selected for the whole frame.

Fig. 16E is a same representation as Fig. 16C. Now, by way of example, the frame period TFP is sub-divided in two sub-frame periods TSFP1 and TSFP2. It is of course

possible to sub-divide the frame period TFP in more than two sub-frame periods. The first sub-frame TSFP1 starts at t_b and ends at $t_m = (t_b + t_e) / 2$. The second sub-frame TSFP2 starts at t_m and lasts until t_e .

It is assumed that the speed of movement is constant, thus the displacement vector TDV is now sub-divided in a first displacement vector TDVS1 and a second displacement vector TDVS2. The magnitude of each of these two sub-divided displacement vectors TDVS1, TDVS2 is half the magnitude of the displacement vector TDV. If the motion speed is not constant and/or the motion path is in different directions the two sub-divided displacement vectors TDVS1, TDVS2 may have different magnitudes and/or directions.

At an assumed linear movement, at the instant t_b , the resampled texels RT_i have the 100% intensity WH from the positions p_1 to p_2 , at the instant t_m , the resampled texels RT_i have the 100% intensity WH from the positions p_3 to p_4 , and at the instant t_e , the resampled texels RT_i have the 100% intensity WH from the positions p_5 to p_6 . At the other positions the intensity RI_i is 0% as indicated by BL.

Fig. 16F shows the filtered texels FT_i for the first sub-frame TSFP1. The one-dimensional filtering ODF is again performed by averaging the "stretched" intensities RI_i of the resampled texels RT_i as elucidated with respect to Figs. 16C and 16D, wherein now the amount of stretching depends on the magnitude of the sub-displacement vector TDVS1. Again, as in Fig. 16D only the envelope of the piece wise constant signal FT_i is shown.

Fig. 16G shows the filtered texels FT_i for the second sub-frame TSFP1. The one-dimensional filtering ODF is again performed by averaging the "stretched" intensities RI_i of the resampled texels RT_i as elucidated with respect to Figs. 16C and 16D, wherein now the amount of stretching depends on the magnitude of the sub-displacement vector TDVS2. Again, as in Fig. 16D only the envelope of the piece wise constant signal FT_i is shown.

The result of sub-dividing the displacement vector TDV in a number of sub-displacement vectors or segments TDVS1, TDVS2, is that the frame rate of providing the intensities PI_i of the pixels P_i (see Figs. 10 and 17) supplied to the display screen increases. If the displacement vector TDV is sub-divided in N sub-displacement vectors TDVS1, TDVS2, instead of one frame (TFP), N sub-frames (TSFP1, TSFP2) are provided and the frame rate of the displayed information increases with a factor N. These N sub-frames are rendered based on a single sampling of the 3D model including the information to determine the displacement vectors TDVS1, TDVS2. The blur size of objects within the sub-frames (TSFP1, TSFP2) is shortened according to the frame rate up-conversion factor N.

Fig. 17 shows a block diagram of a circuit in accordance with an embodiment of the invention comprising the forward texture mapping which generates two motion blurred sub-frames on the basis of a single sampling of the geometry including motion data. Fig. 17 which shows a circuit to obtain a frame rate up-conversion factor of 2 is based on the block diagram shown in Fig. 10 wherein the averager AV, the mapper MSP and the calculator CAL are provided two times to be able to supply the pixel intensities two times per frame. More in general, if a frame rate up-conversion with an integer factor N is desired, N averagers AV, mappers MSP and calculators CAL are provided in parallel. Alternatively, the same single averager AV, mapper MSP and calculator CAL as shown in Fig. 10 may be used which are fast enough to sequentially determine the pixel intensities N times per frame. A combination of both these solutions is also possible.

The operation of the circuit shown in Fig. 17 is elucidated in the now following. The sampler RTS samples within a polygon TGP in the direction of the displacement vector TDV of this polygon TGP to obtain the resampled texels RTi. Therefore, the sampler RTS receives the geometry of the polygon TGP and the displacement information DI from the displacement providing circuit DIG. The displacement information DI may comprise the direction in which the displacement occurs and the amount of displacement and thus may be the displacement vector TDV. The displacement vector TDV may be supplied by the 3D application, or may be determined by the displacement providing circuit DIG from the position of the polygon A in successive frames. The interpolator IP interpolates the intensities of the texels Ti to obtain the intensities RIi of the resampled texels RTi.

In the first branch the one-dimensional filtering ODF comprises an averager AVa which averages the intensities RIi in accordance with a weighting function WF to obtain filtered resampled texels FTia to which is also referred as filtered texels FTia. The mapper MSPa maps the filtered texels FTia within the polygon TGP to the screen space SSP to obtain the mapped texels MTia (see Fig. 4). The calculator CALa determines the intensity contributions of each of the mapped texels MTia to each of the pixels Pi of which a corresponding pre-filter footprint FP of a pre-filter PRF (see Fig. 11) covers one of the mapped texels MTia. The intensity contributions depend on the characteristics of the pre-filter PRF. For example, if the pre-filter has a cubic amplitude characteristic and if a mapped texel MTia is very near to a pixel Pi, the contribution of this mapped texel MTi to the intensity of the pixel Pi is relatively large. If the mapped texel is at the border of the footprint FP of the prefilter which is centered at a pixel Pi, the contribution of the mapped texel MTia

is relatively small. If the mapped texel MT_{ia} is not within the footprint FP of the prefilter of a particular pixel P_i , this mapped texel MT_{ia} will not contribute to the intensity of the particular pixel P_i . The calculator CAL_a sums all the contribution of the different mapped texels MT_{ia} to the pixels P_i to obtain the intensities PI_{ia} of the pixels P_i . The intensity PI_{ia} of a particular pixel P_i only depends on the intensities of the mapped texels MT_{ia} within the footprint FP belonging to this particular pixel P_i and the amplitude characteristic of the pre-filter. Thus for a particular pixel P_i only the contributions of the mapped texels MT_{ia} within the footprint FP belonging to this particular pixel P_i need to be summed.

In the second branch the one-dimensional filtering ODF comprises an averager AV_b which averages the intensities RI_i in accordance with a weighting function WF to obtain filtered resampled texels FT_{ib} to which is also referred as filtered texels FT_{ib} . The mapper MSP_b maps the filtered texels FT_{ib} within the polygon TGP to the screen space SSP to obtain the mapped texels MT_{ib} . The calculator CAL_b determines the intensity contributions of each of the mapped texels MT_{ib} to each of the pixels P_i of which a corresponding pre-filter footprint FP of a pre-filter PRF (see Fig. 11) covers one of the mapped texels MT_{ib} in the same manner as elucidated with respect the the calculator CAL_a .

To conclude, in a preferred embodiment, the invention is directed to a method of generating motion blur in a 3D-graphics system. A geometrical information GI defining a shape of a graphics primitive SGP or TGP is received RSS ; RTS from a 3D-application. A displacement vector SDV ; TDV defining a direction of motion of the graphics primitive SGP or TGP is also received from the 3D-application or is determined from the geometrical information. The graphics primitive SGP or TGP is sampled RSS ; RTS in the direction indicated by the displacement vector SDV ; TDV to obtain input samples R_{Pi} , and an one dimensional spatial filtering ODF is performed on the input samples R_{Pi} to obtain temporal pre-filtering.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. For example, in many of the embodiments above, the processing of only one polygon is elucidated. In a practical application a huge amount of polygons (or more general: graphics primitives) may have to be processed for a complete image.

In the claims, any reference signs placed between parenthesis shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of other elements or steps than those listed in a claim. The invention can be implemented by

means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware.

CLAIMS:

1. A method of generating motion blur in a graphics system, the method comprising:
receiving (RA; RSS; RTS) geometrical information (GI) defining a shape of a graphics primitive (SGP; TGP),
5 providing (DIG) displacement information (DI) determining a displacement vector (SDV; TDV) defining a direction of motion of the graphics primitive (SGP; TGP),
sampling (RA; RSS; RTS) the graphics primitive (SGP; TGP) in the direction indicated by the displacement vector (SDV; TDV) to obtain input samples (R_{Pi}; R_{Li}), and
one dimensional spatial filtering (ODF) of the input samples (R_{Pi}; R_{Li}) to
10 obtain temporal pre-filtering.
2. A method as claimed in claim 1, wherein the step of providing (DIG) displacement information (DI) further defines an amount of motion of the graphics primitive (SGP; TGP), and wherein the step of one dimensional spatial filtering (ODF) is arranged to
15 obtain the temporal pre-filtering with a size of a filter footprint (FP) that depends on the magnitude of the displacement vector (SDV; TDV).
3. A method as claimed in claim 1, wherein the displacement vector (SDV; TDV) is supplied by a 2D or a 3D application.
20
4. A method as claimed in claim 1, wherein the step of providing (DIG) displacement information (DI) receives a model-view transformation matrix from a 2D or a 3D application, said matrix defining the position and orientation of the graphics primitive (SGP; TGP) of a previous frame.
25
5. A method as claimed in claim 1, wherein the step of providing (DIG) displacement information (DI) buffers a position and an orientation of the graphics primitive (SGP; TGP) of a previous frame to calculate the displacement vector (SDV; TDV).

6. A method as claimed in claim 1, wherein

the graphics system is arranged for displaying pixels (P_i) having a pixel intensity (P_{Ii}) on a display screen (DS), the pixels (P_i) being positioned on pixel positions (x, y) in a screen space (SSP),

5 the step of sampling (RA; RSS; RTS) is adapted for sampling (RSS) in the screen space (SSP) in a direction of a screen displacement vector (SDV) being the displacement vector mapped to the screen space (SSP) to obtain resampled pixels (RP_i),
the method further comprises an inverse texture mapping (ITM) receiving coordinates of the resampled pixels (RP_i) to supply intensities (RI_p) of the resampled pixels
10 (RP_i),

the step of one dimensional spatial filtering (ODF) comprises averaging (AV) of the intensities (RI_p) of the resampled pixels (RP_i) to obtain averaged intensities (ARI_p) in accordance with a weighting function (WF),

the method further comprises a resampling (RSA) of the averaged intensities
15 (ARI_p) of the resampled pixels (RP_i) to obtain the pixel intensities (P_{Ii}).

7. A method as claimed in claim 1, wherein

the graphics system is arranged for displaying pixels (P_i) having a pixel intensity (P_{Ii}) on a display screen, the pixels (P_i) being positioned on pixel positions (x, y) in
20 a screen space (SSP),

the method further comprises providing appearance information (TA, TB) defining an appearance of the graphics primitive (SGP) in the screen space (SSP) by defining texel intensities (T_i) in a texture space (TSP),

the step of sampling (RA; RSS; RTS) is adapted for sampling (RTS) in the
25 texel space (TSP) in a direction of a texel displacement vector (TDV) being the displacement vector mapped to the texel space (TSP) to obtain resampled texels (RT_i),

the method further comprising interpolating (IP) the texel intensities (T_i) to obtain intensities (RI_i) of the resampled texels (RT_i),

the step of one dimensional spatial filtering (ODF) comprises averaging (AV)
30 the intensities (RI_i) of the resampled texels (RT_i) in accordance with a weighting function (WF) to obtain filtered texels (FT_i),

the method further comprises:

mapping (MSP) the filtered texels (FT_i) of the graphics primitive (TGP) in the texture space (TSP) to the screen space (SSP) to obtain mapped texels (MT_i),

determining (CAL) intensity contributions from a mapped texel (MTi) to all the pixels (Pi) of which a corresponding pre-filter footprint (PFP) of a pre-filter (PRF) covers the mapped texel (MTi), the contribution being determined by an amplitude characteristic of the pre-filter (PRF), and

5 summing (CAL) the intensity contributions of the mapped texel (MTi) for each pixel (Pi).

8. A method as claimed in claim 6 or 7, wherein at least a direction of the displacement vector (SDV;TDV) of the graphics primitive (GP) is an average of directions of
10 displacement vectors of vertices of the graphics primitive.

9. A method as claimed in claim 6, wherein the step of one dimensional filtering (ODF) comprises:

15 distributing, in the screen space (SSP), the intensities (RIp) of the resampled pixels (RPI) in a direction of the displacement vector (SDV) over a distance determined by a magnitude of the displacement vector (SDV) to obtain distributed intensities (DIi), and
 averaging overlapping distributed intensities (DIi) of different pixels (Pi) to obtain a piece-wise constant signal being the averaged intensities (ARPi).

20 10. A method as claimed in claim 7, wherein the step of one dimensional filtering (ODF) comprises:

 distributing, in the texture space (TSP), the intensities (RIi) of the resampled texels (RTi) in a direction of the displacement vector (TDV) over a distance determined by a magnitude of the displacement vector (TDV) to obtain distributed intensities (TDIi), and
25 averaging overlapping distributed intensities (TDIi) of different resampled texels (RTi) to obtain a piece-wise constant signal being the filtered texels (FTi).

11. A method as claimed in claim 7, wherein the step of one dimensional spatial filtering (ODF) is arranged for applying a weighted averaging function (WF) during at least
30 one frame-to-frame interval.

12. A method as claimed in claim 9 or 10, wherein the distance is rounded to a multiple of the distance (DIS) between resampled texels (RTi).

13. A method as claimed in claim 1, wherein
the graphics system is arranged for displaying pixels (Pi) having a pixel
intensity (PIi) on a display screen, the pixels (Pi) being positioned on pixel positions (x,y) in
a screen space (SSP),
5 the method further comprises the step of providing appearance information
(TA, TB) defining an appearance of the graphics primitive (SGP) in the screen space (SSP)
by defining texel intensities (Ti) in a texture space (TSP),
the step of sampling (RA; RSS; RTS) is adapted for sampling (RTS) in the
texel space (TSP) in a direction of a texel displacement vector (TDV) being the displacement
10 vector mapped to the texel space (TSP) to obtain resampled texels (RTi),
the method further comprising interpolating (IP) the texel intensities (Ti) to
obtain intensities (RIi) of the resampled texels (RTi),
the step of one dimensional spatial filtering (ODF) comprises
subdividing the displacement vector (TDV) in a predetermined number of
15 segments () to obtain segment displacement vectors (STDV), and for each one of the
segments ():
distributing, in the texture space (TSP), the intensities (RIi) of the resampled
texels (RTi) with a direction, a position and a magnitude according to an associated one of
the segment displacement vectors (STDV) to obtain averaged overlapping distributed
20 intensities (TDIi) of different resampled texels (RTi) to obtain a piece-wise constant signal
being the motion blurred filtered texels (FTi),
the method further comprises for each one of the segments ():
mapping (MSP) the filtered texels (FTi) of the graphics primitive (TGP) in the
texture space (TSP) to the screen space (SSP) to obtain mapped texels (MTi),
25 determining (CAL) intensity contributions from a mapped texel (MTi) to all
the pixels (Pi) of which a corresponding pre-filter footprint (PFP) of a pre-filter (PRF) covers
the mapped texel (MTi), the contribution being determined by an amplitude characteristic of
the pre-filter (PRF), and
summing (CAL) the intensity contributions of the mapped texel (MTi) for
30 each pixel (Pi).
14. A graphics computer system comprising:
means for receiving (RA; RSS; RTS) geometrical information (GI) defining a
shape of a graphics primitive (SGP, TGP),

means for providing (DIG) displacement information (DI) determining a displacement vector (SDV;TDV) defining a direction of motion of the graphics primitive (SGP; TGP),

- 5 means for sampling (RA; RSS; RTS) the graphics primitive (SGP; TGP) in the direction indicated by the displacement vector (SDV;TDV) to obtain input samples (R_{Pi}; R_{Ii}), and

means for one dimensional spatial filtering (ODF) of the input samples (R_{Pi}; R_{Ii}) to obtain temporal pre-filtering.

ABSTRACT:

In a method of generating motion blur in a 3D-graphics system, geometrical information (GI) defining a shape of a graphics primitive (GP) is received (RSS; RTS) from a 3D-application. A displacement vector (SDV; TDV) defining a direction of motion of the graphics primitive (GP) is also received from the 3D-application or is determined from the geometrical information. The graphics primitive (GP) is sampled (RSS; RTS) in the direction indicated by the displacement vector to obtain input samples (R_{Pi}), and an one dimensional spatial filtering (ODF) is performed on the input samples (R_{Pi}) to obtain temporal pre-filtering.

10 Fig. 6

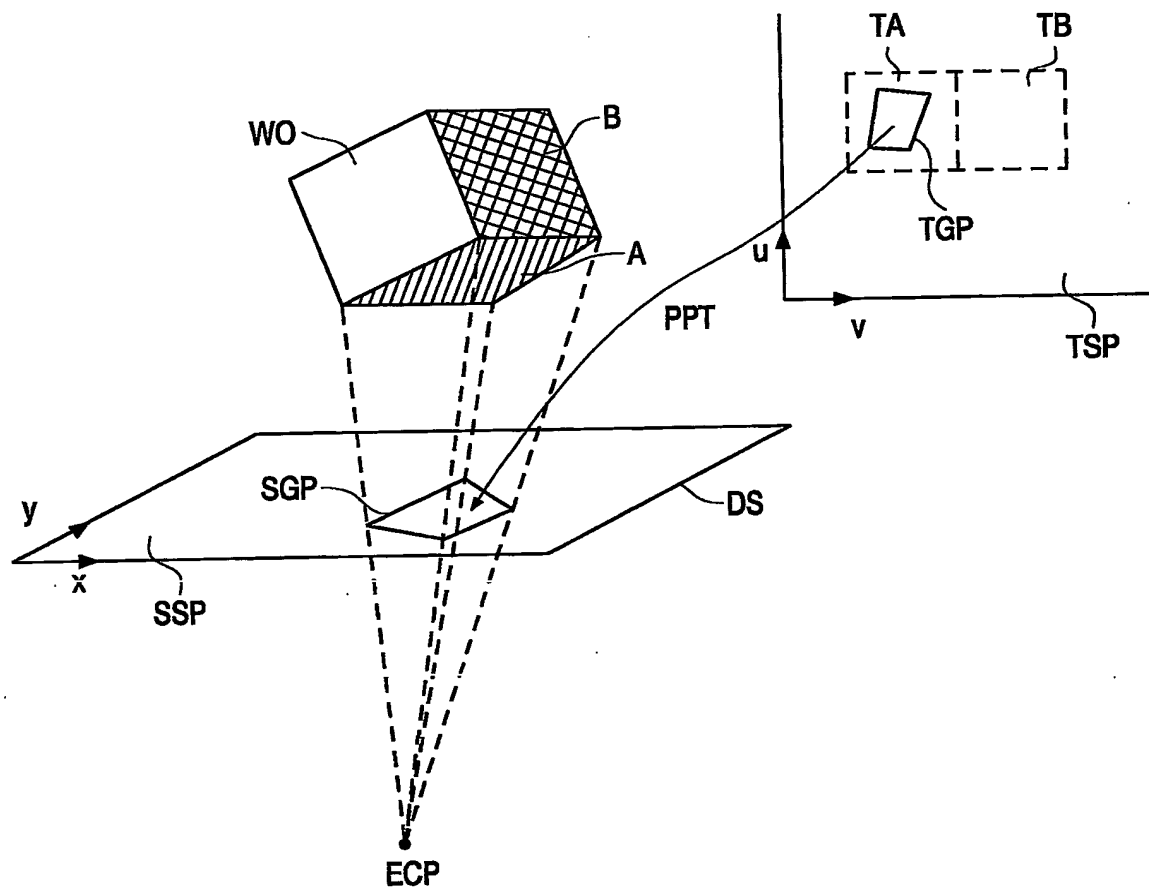


FIG. 1

2/10

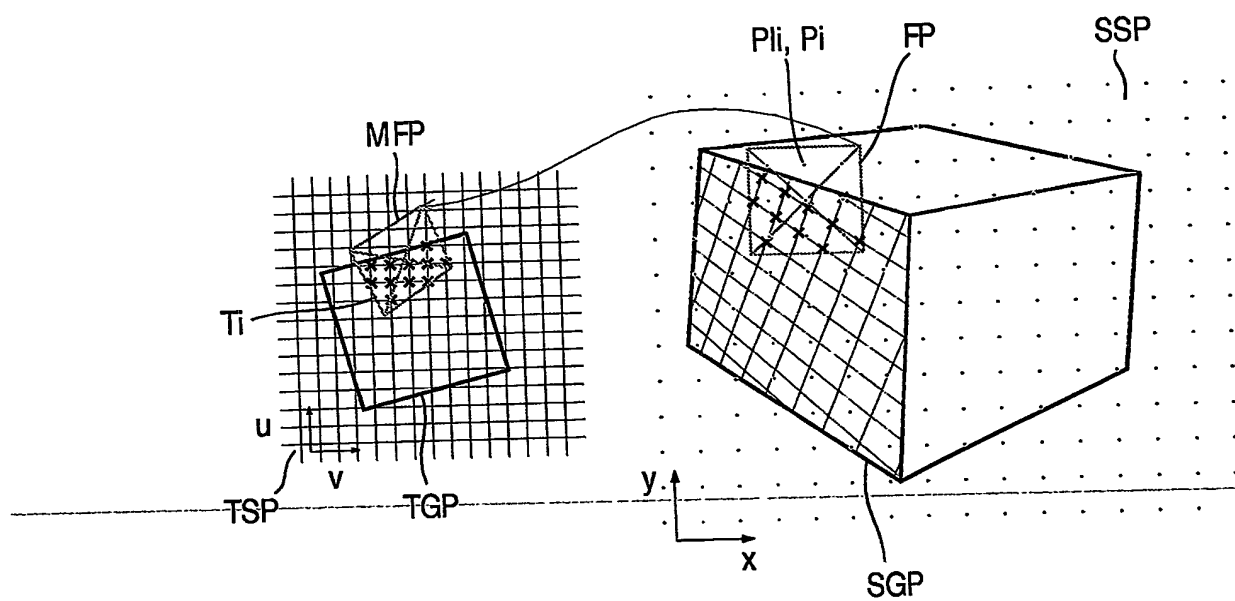


FIG. 2

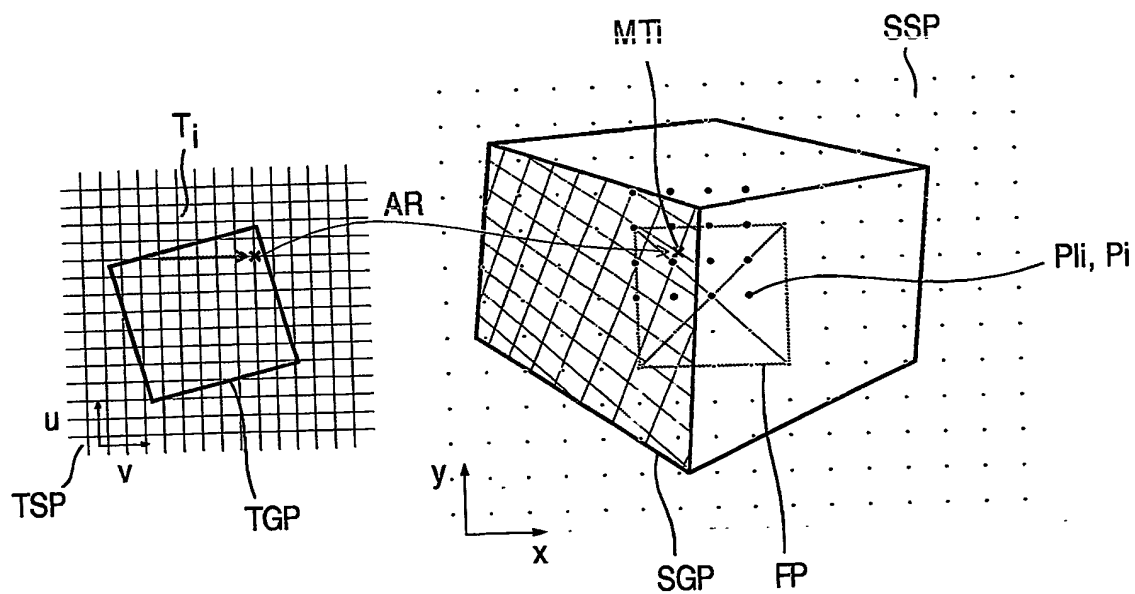


FIG. 4

3/10

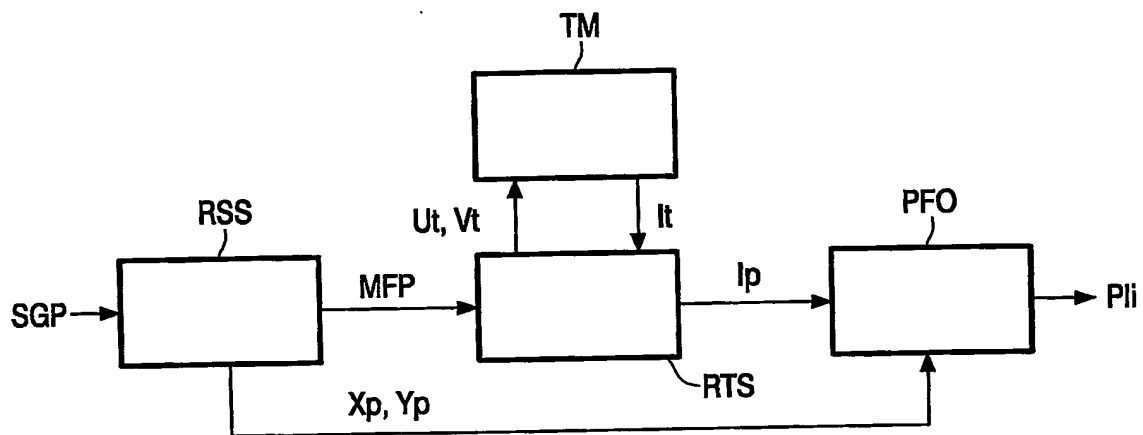


FIG. 3

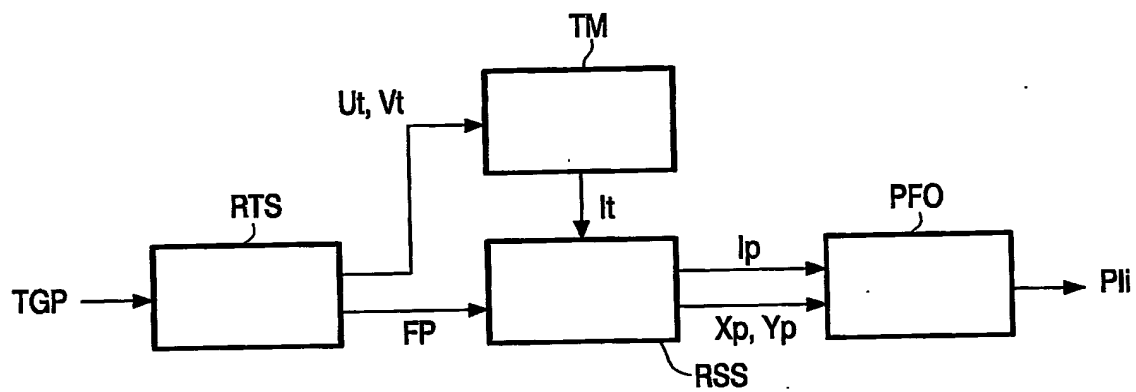


FIG. 5

4/10

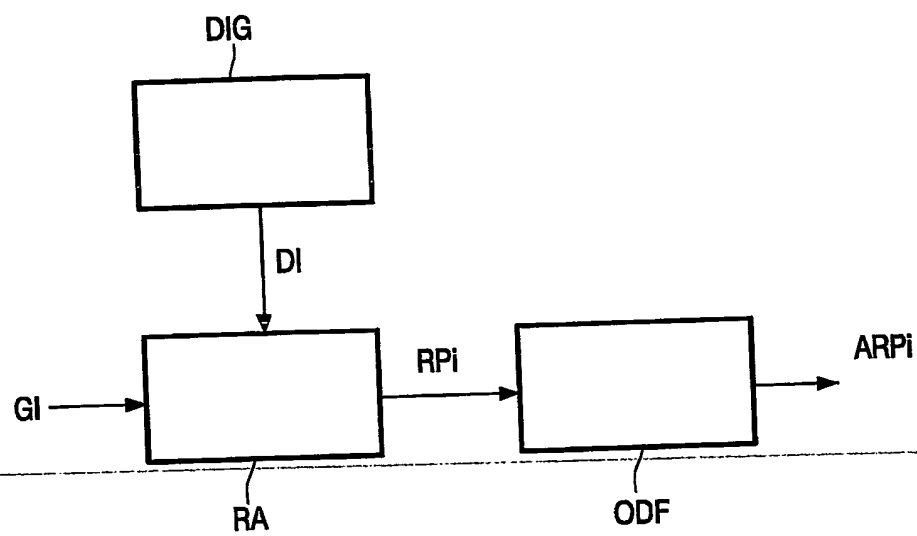


FIG. 6

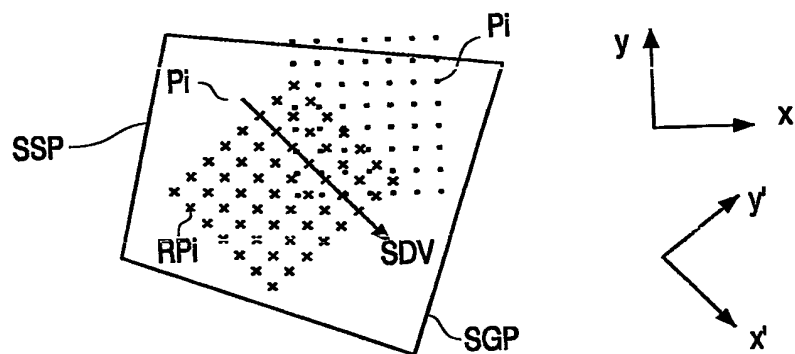


FIG. 7

5/10

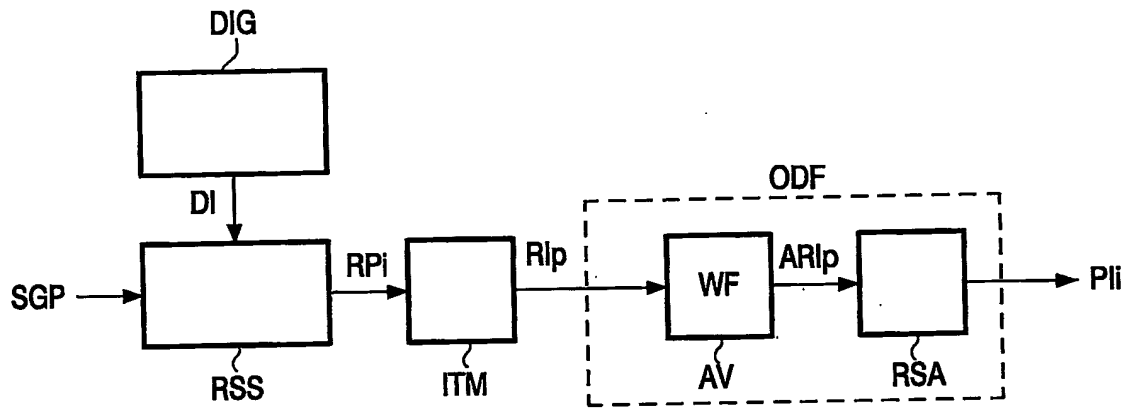


FIG. 8

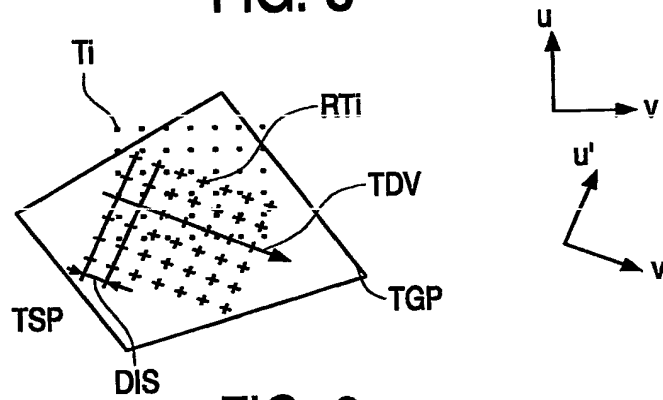


FIG. 9

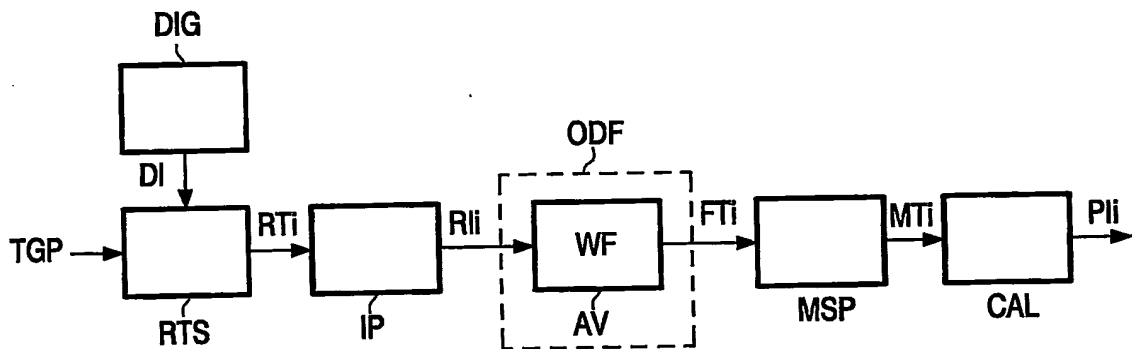


FIG. 10

6/10

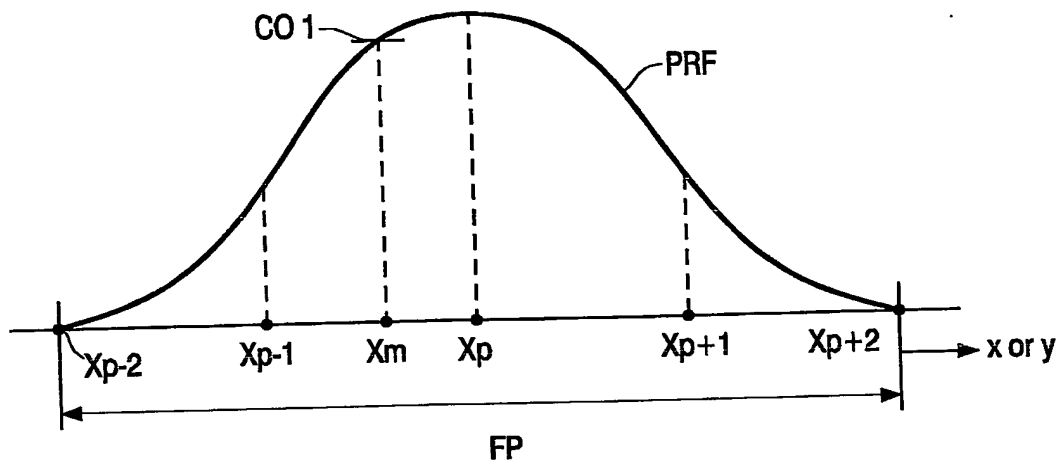


FIG. 11

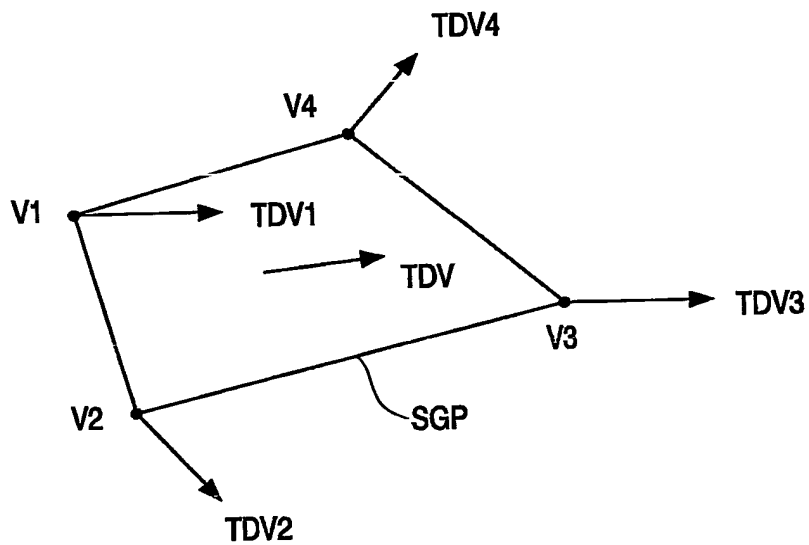


FIG. 12

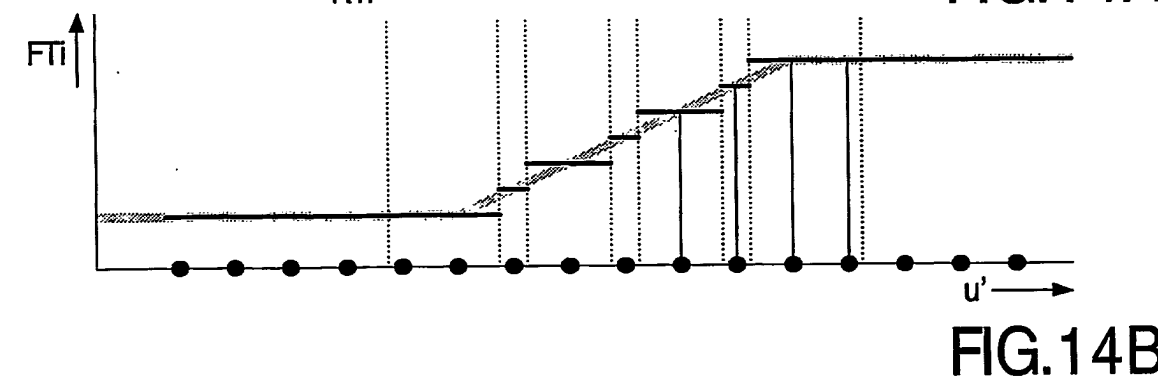
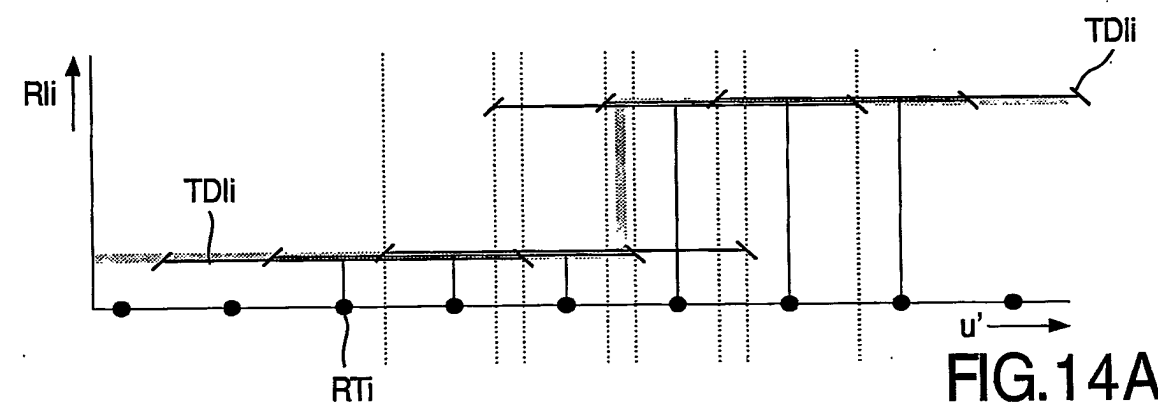
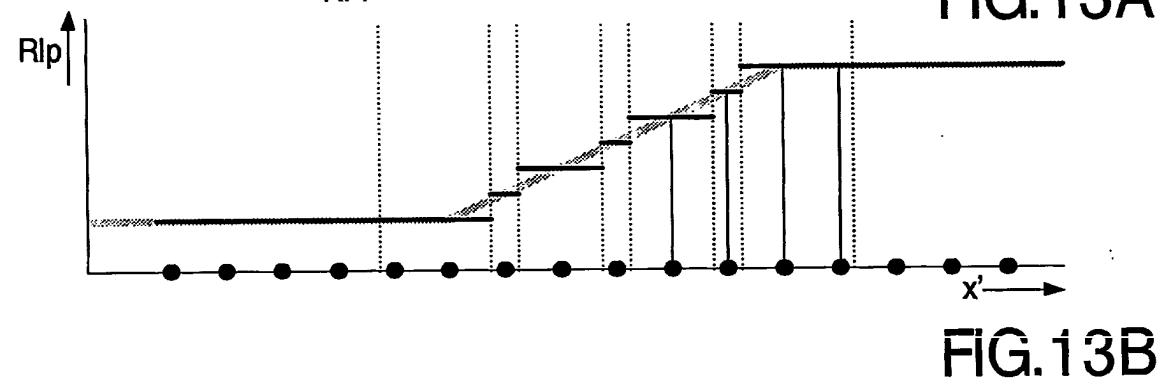
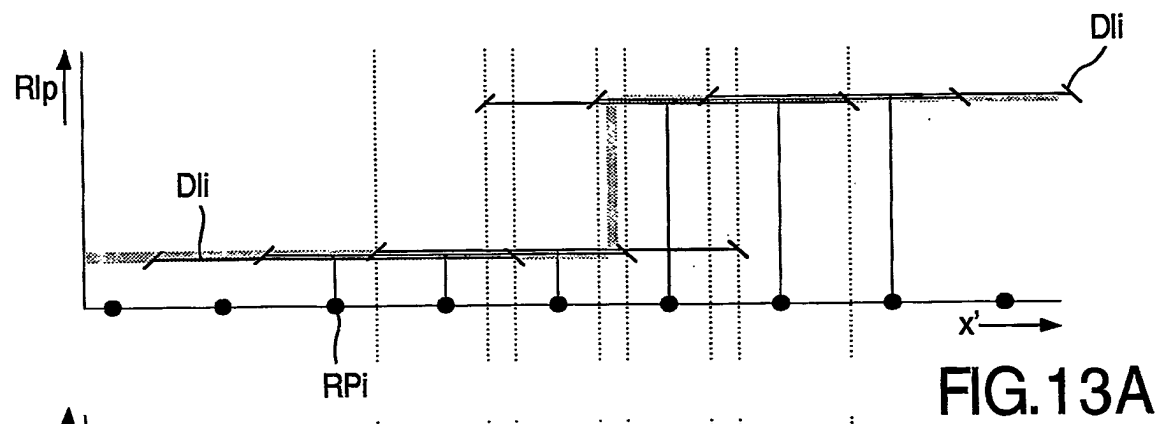


FIG. 15A









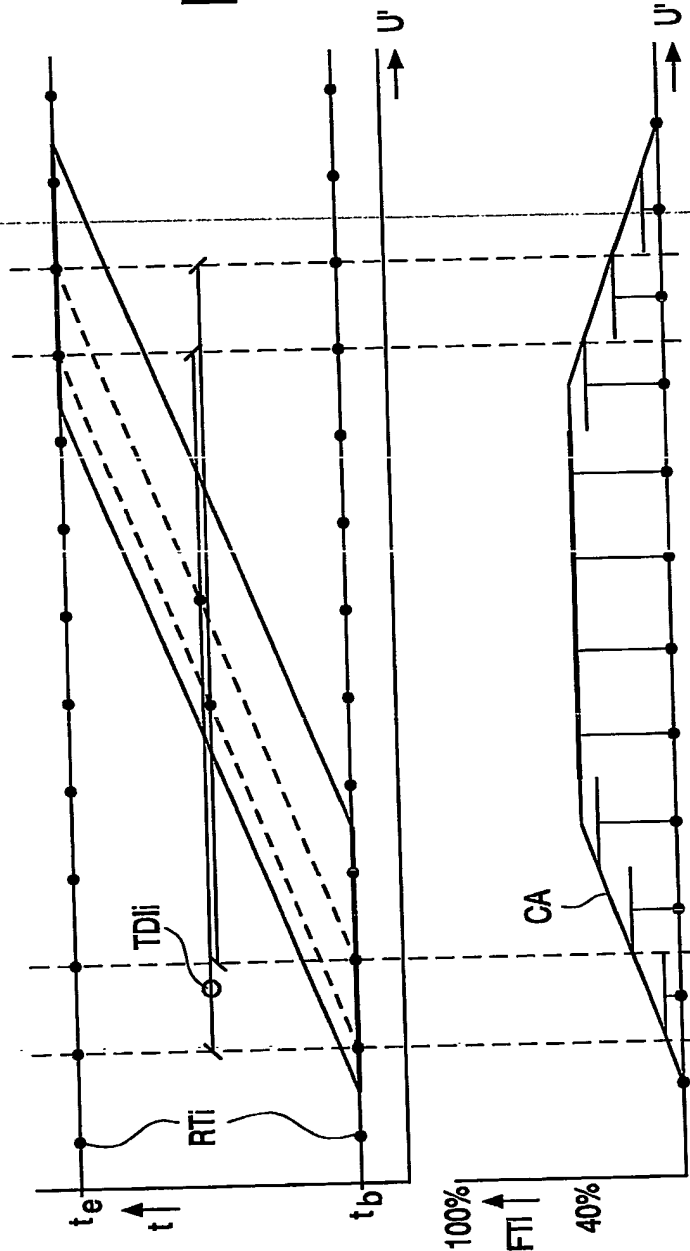


FIG. 15B

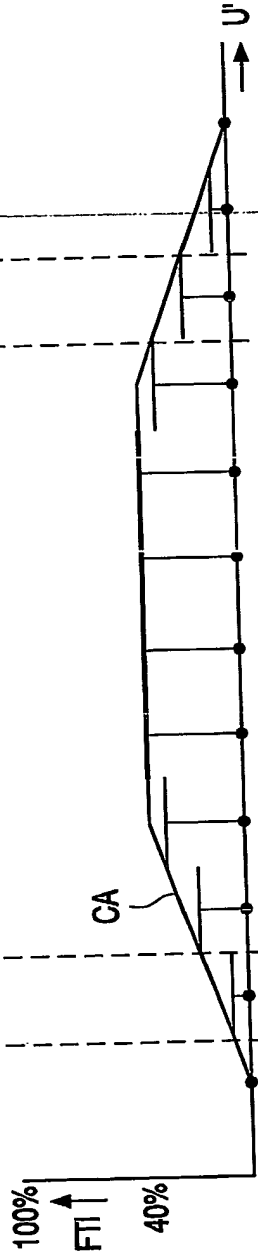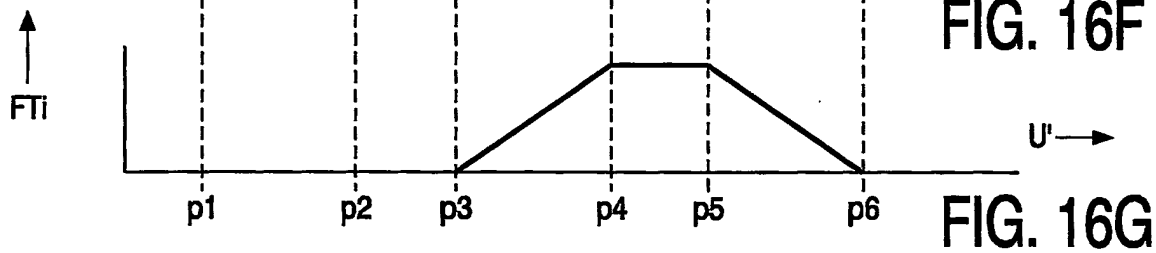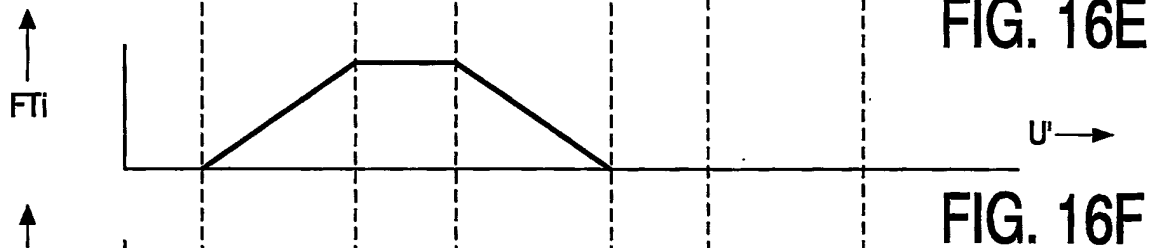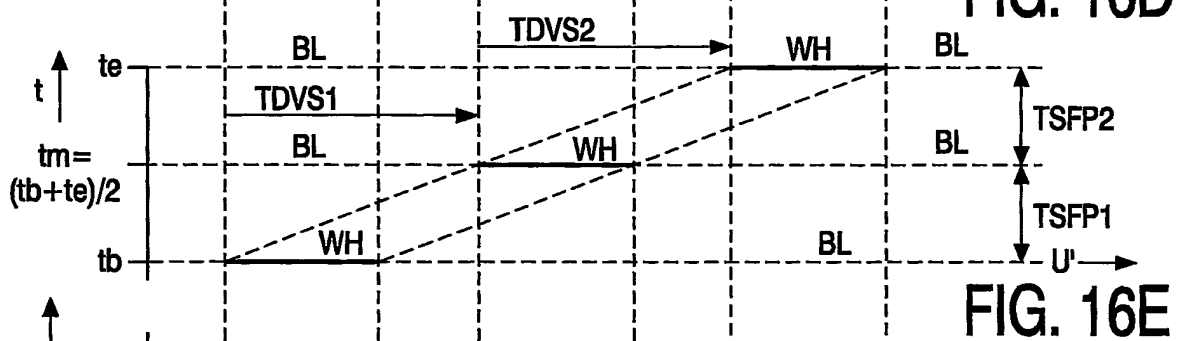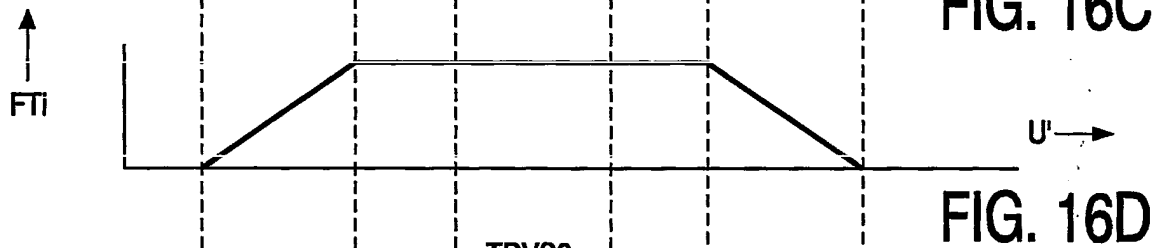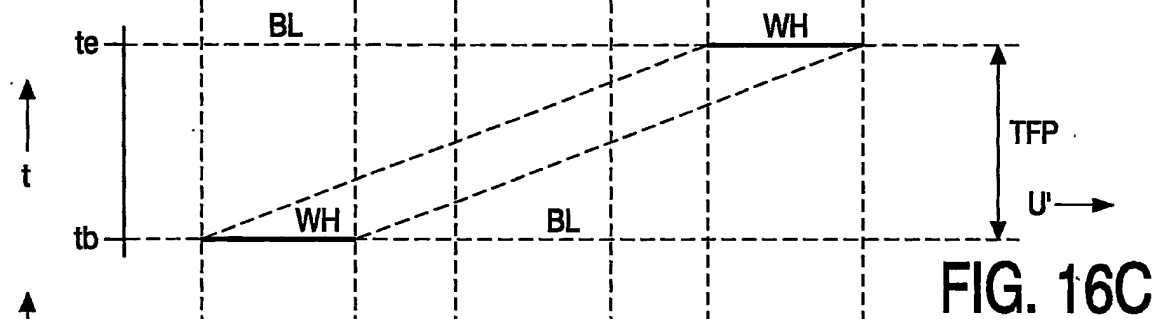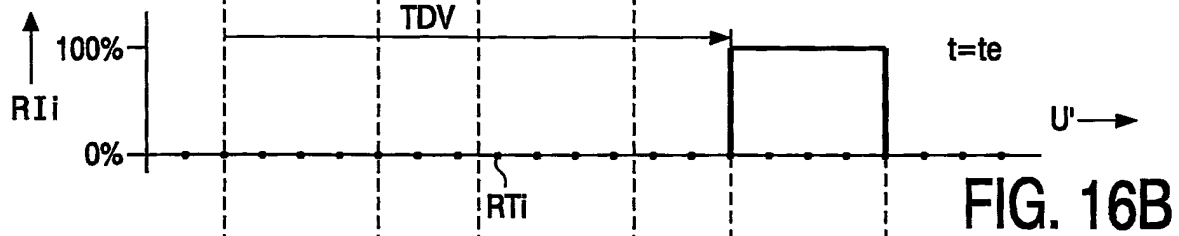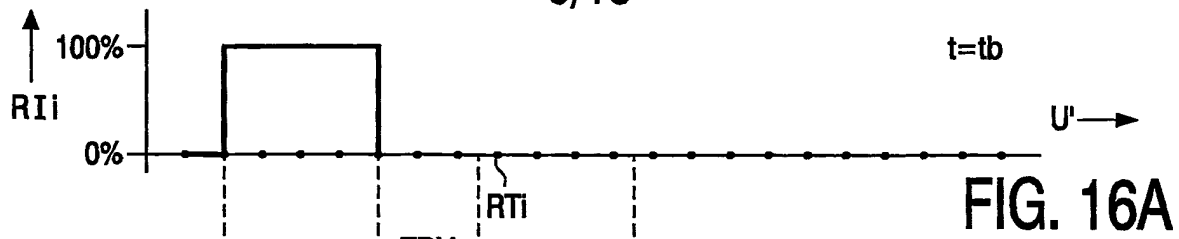

9/10



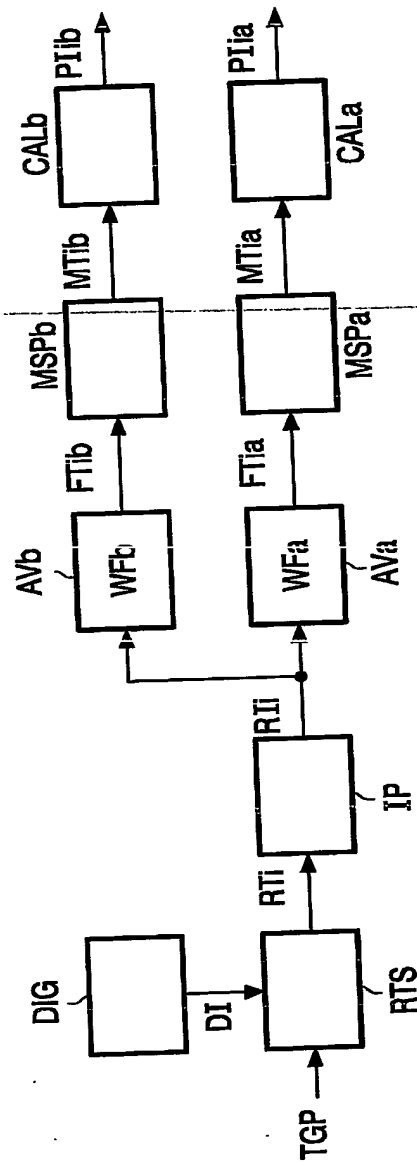


FIG. 17

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.